


NOTES

- 1. DETAILS SHOWN ON THIS PLAN APPLY TO ALL CONSTRUCTION OR RECONSTRUCTION OF STREETS, CURBS, AND/OR SIDEWALKS.
- 2. CURB CUT RAMPS SHALL BE LOCATED AS SHOWN ON THE PLANS.
- 3. HANDICAP RAMPS SHALL BE PROVIDED AT ALL CORNERS OF STREET INTERSECTIONS WHERE THERE ARE EXISTING OR PROPOSED SIDEWALKS. CURB CUT RAMPS SHALL ALSO BE PROVIDED AT CROSS-WALK LOCATIONS IN MID-BLOCK.
- 4. THE SURFACE TEXTURE OF THE RAMP SHALL BE THAT OBTAINED BY A COARSE, TRANSVERSE, BROOMING OF THE SLOPE OF THE RAMP.
- 5. CARE SHALL BE TAKEN TO ASSURE A UNIFORM GRADE ON THE RAMP, FREE OF SAGS AND SHORT GRADE CHANGES.
- 6. DRAINAGE STRUCTURES SHALL NOT BE PLACED IN LINE WITH RAMPS.
- 7. THE NORMAL GUTTER LINE PROFILE SHALL BE MAINTAINED THROUGH THE AREA OF THE RAMP.
- 8. CROSSWALK AND STOPLINE MARKINGS, IF USED, SHALL BE LOCATED SO THAT TRAFFIC STOPS SHORT OF RAMP CROSSINGS.
- 9. DESIRABLE DIMENSIONS SHALL BE USED UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

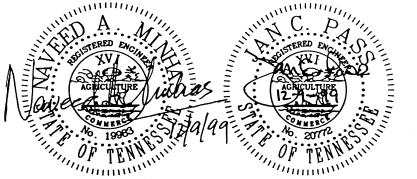

2967

INITIAL ISSUE REVISION

CITY OF CHATTANOOGA AND HAMILTON COUNTY

HANDICAP RAMP DETAILS

DATE OF ORIGINAL ISSUE DECEMBER 10, 1999

STANDARD NUMBER:

SD-205.01